



Faste lameller/
Bevægelige lameller


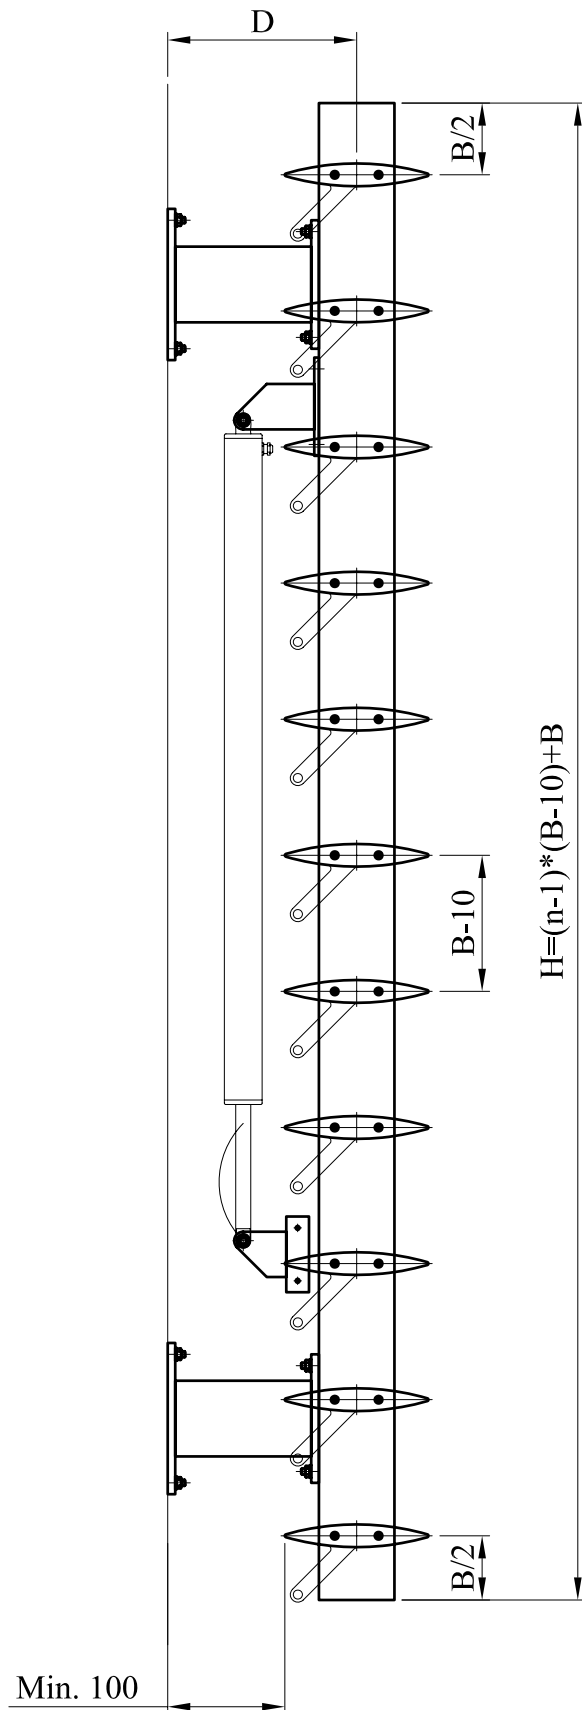


n=Antal lameller

Standard udførelse
af endebunde for
bevægelige lameller

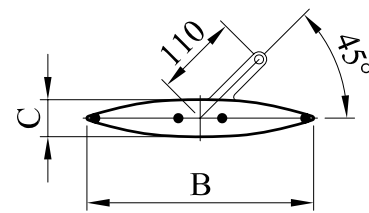

Endebunde for standard
hældning af faste lameller udføres i
følgende vinkler fra vandret:
0° - 15° - 30° - 45°

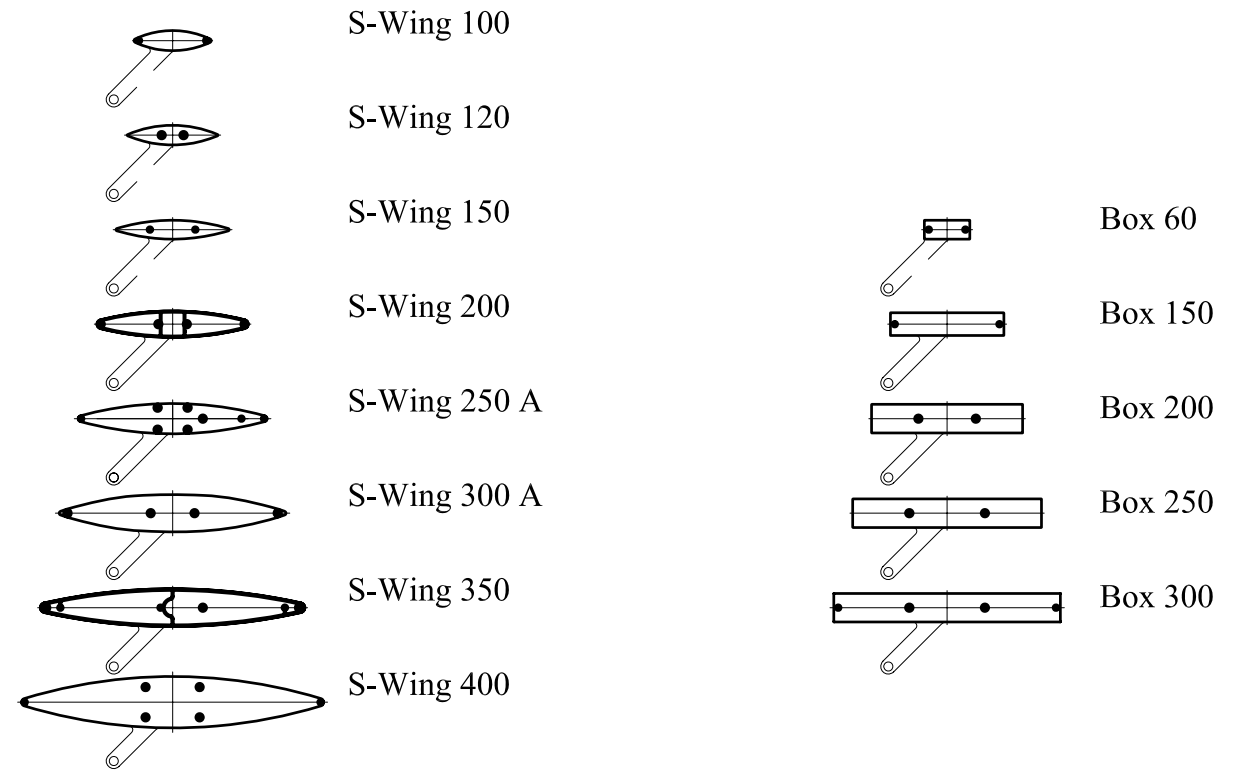

| Lamel Bevægelige+Faste | B | C | D | Understøtning Max. C-C |
|---------------------------|---------|----------|---------|---------------------------|
| S-Wing 100 | 102 mm. | 27 mm. | 210 mm. | 2.400 mm. |
| S-Wing 120 | 120 mm. | 26 mm. | 210 mm. | 2.400 mm. |
| S-Wing 150 | 150 mm. | 25 mm. | 210 mm. | 2.400 mm. |
| S-Wing 200 | 200 mm. | 25 mm. | 220 mm. | 2.400 mm. |
| S-Wing 250 A | 250 mm. | 40 mm. | 230 mm. | 3.200 mm. |
| S-Wing 300 A | 300 mm. | 50 mm. | 250 mm. | 4.100 mm. |
| S-Wing 350 | 350 mm. | 50 mm. | 275 mm. | 4.100 mm. |
| S-Wing 400 | 400 mm. | 68 mm. | 300 mm. | 5.100 mm. |
| Box 60 | 60 mm. | 25 mm. | 210 mm. | |
| Box 150 | 150 mm. | 30 mm. | 210 mm. | 2.500 mm. |
| Box 200 | 200 mm. | 37,8 mm. | 220 mm. | 2.800 mm. |
| Box 250 | 250 mm. | 37,8 mm. | 230 mm. | 2.800 mm. |
| Box 300 | 300 mm. | 37,8 mm. | 250 mm. | 2.800 mm. |

Emne:
Solatek - Lamelafskærmning Type SW-01

Materiale:
Aluminium
Overflade:
Anodisering / PPP lakering

Tegn. nr.:
SW-01 (DK)
Mål:
~
Dato:
20.01.2010
Sign.:
TC
Rev.:
05.11.2019

SOLATEK

SOLATEK APS
Markskellet 4 · DK-8585 Glesborg · Telefon 86 99 88 28 · Fax 86 99 88 27 · www.solatek.dk